

Mechanical	
Dimensions	149 x 63 x 70 mm (5.9 x 2.2 x 2.8 inches)
Housing	Moulded polycarbonate
Mounting	Suitable plain surface
Fixing	4mm., maximum diameter
Environmental	
Operating temp'	-35°C to +66°C
Humidity	85±5% at 30±2°C (86±3°F)
Ingress	Suitable for INDOOR use only
Electrical	
Voltage	see table below
Current	see table below
Data Voltage	Rest >4Vdc / Active <1Vdc
Data output	see table below
Indication	1 RGB LED + BIO sensor finger plate illumination
Sounder	Integral speaker
Termination	Screw - see DATASHEET: TERMINAL CONNECTIONS



LEGIC PARTNER
prime / advant

MIFARE
Registered Partner
MIFARE Classic®
MIFARE®DESFire®
CSN or Sector data


FC

CE

RoHS
compliant

SECURITY
UL
LISTED

base model No.	frequency	current mA	voltage Vdc	terminal connection	technology	RFID card	keypad output	optical tamper	Wiegand Clock&Data	OSDP	CE WEEE RoHS	FCC	UL
RX660	13.56 MHz	450	8 - 12	A	Third Millennium LEGIC®	PC06			•		•		•
RX690	13.56 MHz	450	8 - 12	A	Third Millennium LEGIC®	PC09			•		•		•

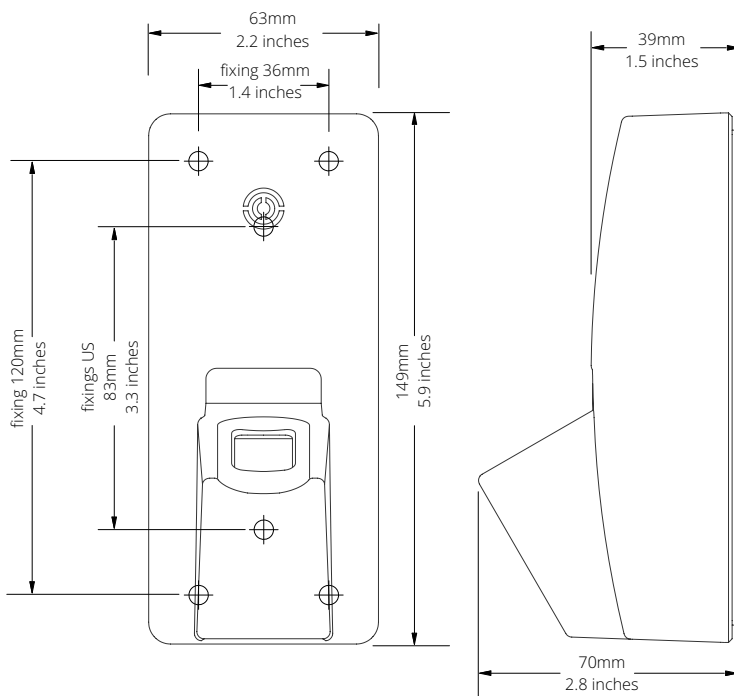

Key features

- Multi-technology
- UK design and manufacture
- Black high gloss finish
- Clean design
- RGB LED
- Multispectral imaging BIO sensor finger plate
- 'template-on-a-card'
- Read range up to 10cm (4 inches)
- 1 year limited warranty

PLEASE CALL **+44 (0) 1495 751 992** to discuss your CUSTOM CONFIGURATION or LEGIC® reader requirements.

'MIFARE', 'MIFARE Classic' and 'MIFARE DESFire EV2' are trademarks of NXP B.V.