



Scan the QR code or link to the address below to find a list of datasheets to all products and other support information.
<https://www.tm-readers.com/downloads.htm>



Mechanical

Dimensions	87 x 87 x 39 mm (3.8 x 2.1 x 1.5 inches)
Housing	ABS
Mounting	Suitable plain surface
Fixing	4mm., max' diameter

Overview

The RX1 BACK BOX is an optional extra, providing a high profile mounting base to the RX1 and RX1K advanced access control readers.



(back box with RX1K fitted)

Reader Models are sold as customer-specific configurations.

Please call +44 (0) 1495 751 992 to discuss your custom configuration or LEGIC® reader requirements.


MODEL

RX1 BACK BOX

The unit replaces the standard backplate to the reader, offering an alternative method of mounting the module, especially when installing security projects to existing architecture, and using 20mm diameter surface-mount conduit cable trunking.

The BACK BOX provides several screw hole fixing points with a defined cable access to the reader, and easier positioning of wiring to the reader's connection terminal.

The greater depth provided by the back box permits 20mm diameter cable trunking to be properly secured inside the box when using a standard hex nut.

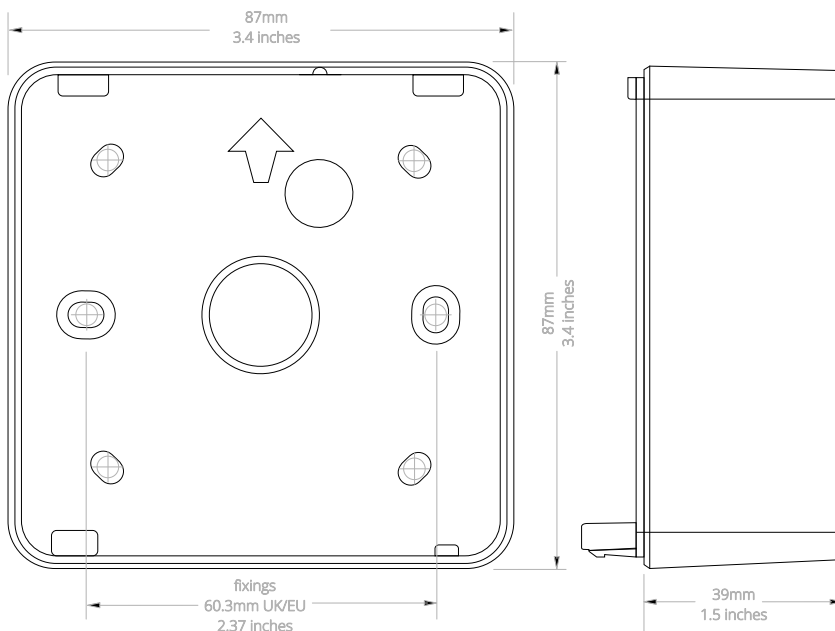

Key features

- UK design and manufacture
- Black matt finish
- Tough ABS
- Slim profile
- The back box is supplied with a tamper detection pillar fitting. YOU DO NOT NEED TO INSTALL THIS MECHANISM IF YOUR READER IS NOT FITTED WITH TAMPER DETECTION

